

A Smart Renewable Energy Solution

60W

All-in-One Integrated Solar LED Street Light

Specifications


HT-SS-1H60

Document version: **HT-SS-1H60-SPEC-V2.5**

Sept. 2015

HT-SS-1H60 All-in-one Solar LED Light Specifications

Parameter		Value
Solar panel (Sunpower)	Max power	33V 100W
	Life time	25 years
Battery	Type	614WH LiFePO ₄ battery
	Life time	>2,000 Circles (more than 5 years)
LED Lamp	Max power	24V 60W
	LED chip brand	Bridgelux from USA
	Lumen (LM)	6,000-7,000lm
	Life time	50,000hours
	Viewing Angle	150°/75°
Charging time	by sun(strong)	6~8hours
Discharging time	Full power	>10hours
	30% Saving Mode	>35hours
Working Temperature	Range(°C)	-30°C~+60°C
Colour temperature	Range(k)	6000k~6500k
Mounting height	Range (m)	6-9m(suggested)
Space between light	Range (m)	20-25m(suggested)
Housing material	Aluminum alloy	
Certificate	CE / ROHS / IP65	
Packing & Weight	Product size	1,350*413*138mm
	NW.for one unit	24kg
	Carton size	1,410*465*190mm
	Q'ty/ctn	1sets/ctn
	GW.for carton	27kg
Packs Containers	20GP	160pcs
	40GP	330pcs

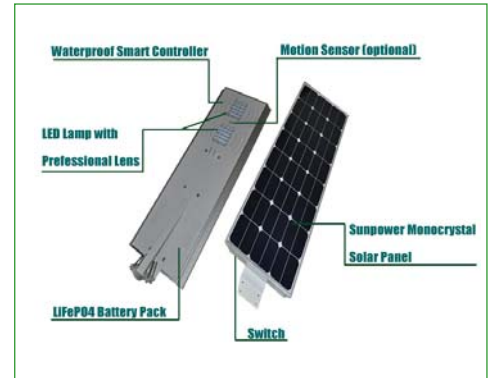

* Contents are subject to change without prior notice.

Hitechled Optoelectronics Co.,Ltd.

Office Add.: 21st F, Bldg.B, GLC Plaza, Baoming 2nd Road, Bao'an district, Shenzhen, China 518102

☎ Tel: +86 755 33653232

☎ Fax: +86 755 33653211

✉ E-mail: sales@hi-techled.com

🌐 Http://www.hi-techled.com